



The escapement pass Mega test requirement.

Stabilized and durable.




Pushing Board used.

Silence. Not damage nipples.



High RPM Pneumatic Screwdriver used.

Faster assembly of nipple into spoke.

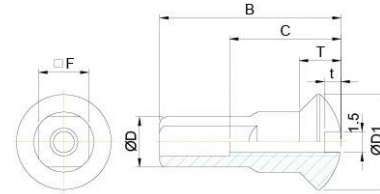

GAUGE NO	DIMENSIONS m/m								
	D ± 0.1	DI ± 0.5	F ± 0.1	B ± 0.3	T ± 0.1	t ± 0.1	C ± 0.1	THREAD	
FLATHEAD	NO.15	3.9	6.3	3.4	12.0	2.8	1.0	8.5	BC 1.8
		3.9	6.1	3.2	16.0	2.8	1.0	9.5	BC 1.8
	NO.14	3.9	6.3	3.4	12.0	2.8	1.0	8.5	BC 2.0
		3.9	6.1	3.2	16.0	3.2	1.5	9.5	BC 2.0
	NO.13	4.3	6.8	3.6	13.0	3.0	1.2	9.0	BC 2.3
		4.3	6.8	3.6	16.0	3.0	1.2	10.0	BC 2.3
		5.0	7.7	4.3	14.0	3.0	1.2	11.0	BC 2.3
	NO.12	4.6	7.3	3.9	13.0	3.2	1.2	9.0	BC 2.6
		4.6	7.3	3.9	16.0	3.2	1.0	10.0	BC 2.6
	NO.11	5.0	7.7	4.3	14.0	3.3	1.5	11.0	BC 2.9
	NO.10	5.8	8.7	4.9	14.5	3.5	1.8	11.0	BC 3.2
	NO.9	6.5	10.0	5.6	16.0	4.0	2.0	12.0	BC 3.5


## CE certificate



Rubber grip, suiting the ergonomics requirement.

Conform and not chilling.

BIT with pin is included to avoid over-fastening of nipple which may cause offset.

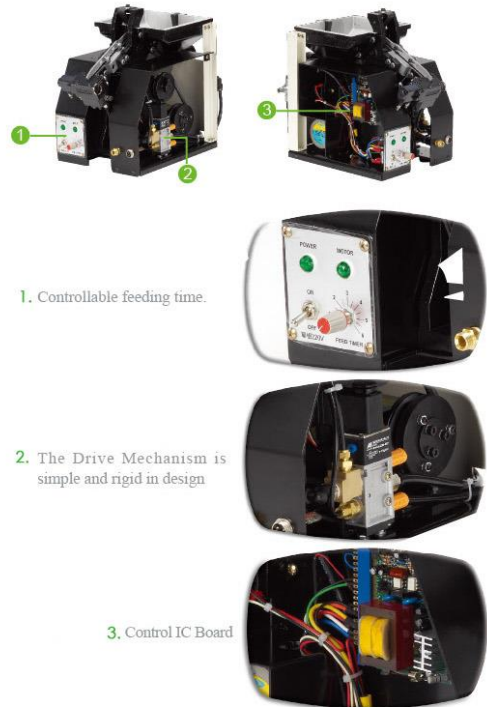

1. Controllable feeding time.

2. The Drive Mechanism is simple and rigid in design

3. Control IC Board